

Security Box

for DVR and video surveillance

Solution to protect against unwanted access



Keeping sensitive data locked up

This is the ideal solution to secure your video surveillance system from unauthorized access; in fact, it allows you to install a video recorder and a monitor inside, as well as smaller switches using the 1U 19" / 10" bracket provided.

- Convenience:** the devices can be installed directly on the cover which allows a quick and practical access thanks to the 90° opening. The devices will therefore be found in a horizontal position. The monitor is installed on the bottom where the VESA 50/75 and 100 attachment is located.
- Safety:** the **single-piece metal structure** is particularly solid and robust and, together with the **double lock** provided with different keys, guarantees maximum safety and protection.
- Versatility:** the sides **have pre-cut profiles** that facilitate the wiring management; the inside is ready for installation of a 10" PDU. Equipped with a **1 unit bracket** for fixing small rack equipment and an adjustable **L-shaped bracket** for DVR installation. **Slits** on all sides of the box conduct away heat; two fans can be installed into the sides for enhanced heat dissipation.



QUALITÀ
italiana



TECHly[®]
PROFESSIONAL

WWW.TECHLY.COM



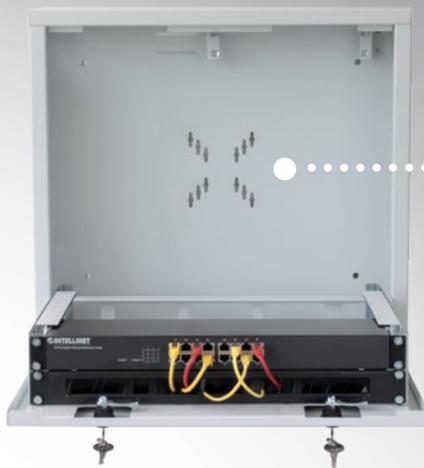

Features:

- Metal cabinet for video surveillance with door and double key lock (different keys); mod. ICRLIM08AI2 is equipped with an anti-intrusion tubular key
- Tray for housing equipment equipped with 19" 1U bracket with length 36.5 cm, adjustable in width (minimum 24 cm, maximum 48 cm)
- L-shaped bracket for fixing equipment with no 19" / 10" connection (minimum height of 1 cm to 5 cm maximum)
- Possibility of replacing the 1U bracket with 2U bracket (ICRLIRAIL2) for housing 2 peripherals (monitor cannot be installed)
- Fins for fixing a 10" PDU (width adjustable from 25.7 cm to 34.2 cm); we recommend to purchase I-CASE M10-4
- Sides provided with passive dissipation slots; upper part ready for fixing a fan to increase the air flow; pre-cut profiles for cable entry in the lower part of the side (dimensions 13 x 4 cm)
- Roof and base equipped with slots for heat exchange and two pre-cut profiles for cable entry (dimensions 6.5 x 4 cm)
- Bottom fitted with VESA connection 50x50, 75x75, 100x100 suitable for monitor installation
- Back with 11 mm spacers for wall mounting
- External dimensions (W x H x D): 58 x 54.6 x 15 cm
- Color: Gray RAL7035 or White RAL9016



Recommended accessories



P/N: I-CASE M10-4D
PDU with 4 Schuko sockets



P/N: ICRLIMRAIL2
2U bracket

codice	W mm	D mm	H mm	color
ICRLIM08	596	127	596	grey
ICRLIM08W2	596	127	596	white
ICRLIM08AI2	596	127	596	white

