


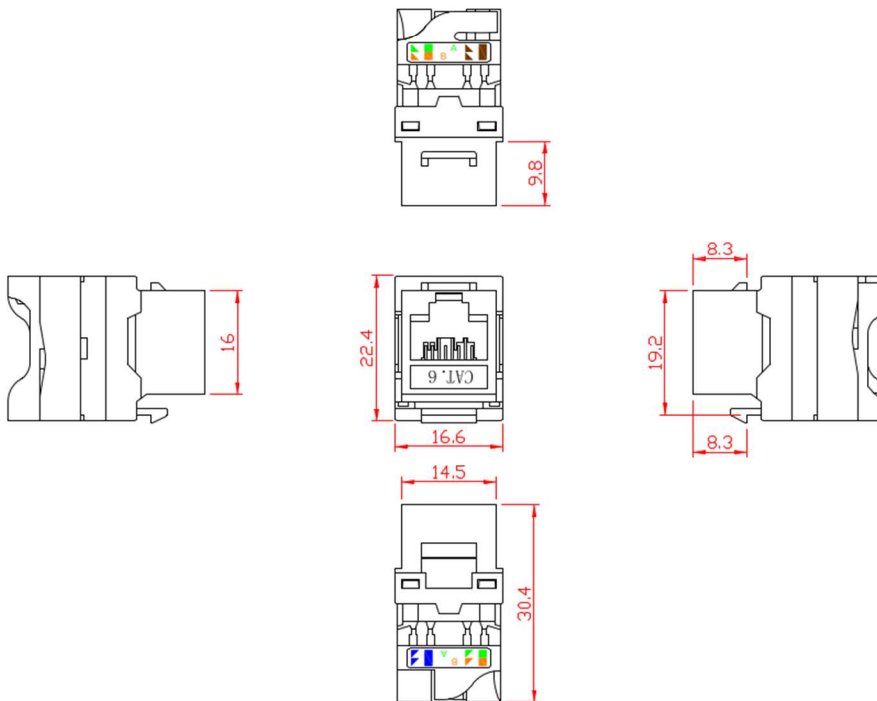

NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. THE SHELL MATERIAL: ZINC ALLOY
2. HOUSINGG MATERIAL:PC
3. INSERT MATERIAL:FAME RETARDANCY PBT
4. PCB MATERIAL:FR-4 T=1.6mm
5. CONTACT MATERIAL:PHOSPHOR BRONZE STAMP
PIN T=0.30mm
6. IDC CONTACT MATERIAL:PHOSPHOR BRONZE
T=0.50mm WITH TIN PLATING
7. RJ45 JACK ;IFE:750 TIMES MIN
8. IDC LIFE:200 TIMES MIN
9. WIRE:AWG 22-26

										
									Item No.	IWP-MD C6UROT T
SYM	Number	Bill No. of Alteration	Signature	Date	Material					
					Angles Projection	Size	Scale	Unit		
		2015.12.31	Tolerance			A4	X:1	mm	Part Name	UTP Cat6 Keystone Jack
		2015.12.31	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20						ERP	Part No.
		2015.12.31	100.00- Angle ±0.25 ±30'							
					Sheet	1 OF 1	Version: A/0			

IWP-MD C6UROT

UTP Cat6 Keystone Jack