


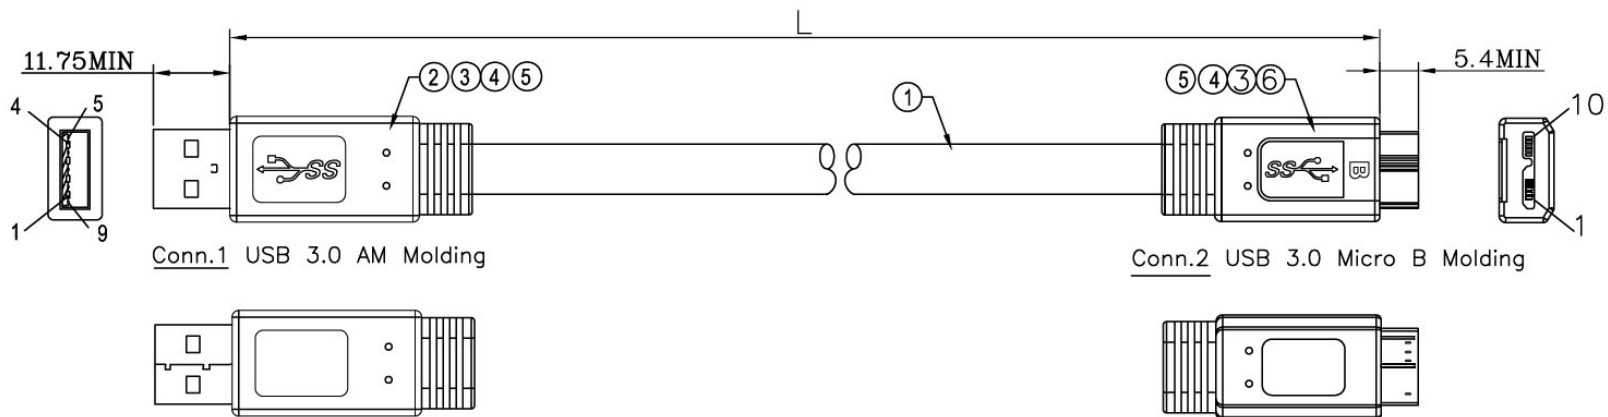

PIN Assignment

Conn.1		Conn.2
1	RED	1
2	SHITE	2
3	GREENG	3
4	BLACK	4 NC
5	blue	5
6	yellow	6
7	land	7
8	land	8
9	purple	9
	orange	10

Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot:300V DC/10ms

USB 3.0 AM TO Micro BM Cable Blue

NO	DESCRIPTION		TOLERANCE INCHES	M/M
6	USB 3.0 Micro B(M) the plug PIN needle gold-plated 5 u gilded iron shell welding line type black rubber core	⊕	.X	.015 .30
5	Transparent PE material environmental protection low density		.XX	.010 .10
4	45 p start with blue rubber PVC materials environmental protection (PVC001-6008		.XXX	.005 .05
3	φ 2.0 H. S. T BLACK 7mm*2pcs, 5mm*2pcs.			
2	USB 3.0 A(M) Short body blue rubber core PIN needle gold-plated 3 u "ironclad gold-plated G/F			
1	UL2725 [26AWG(7/0.16TA)*2C+EAM]*2+(26AWG*2C+A)+20AWG*2C OD:3.0*11.8MM BLUE MARKING:··· SPACE SHUTTLE-D Universal Serial Bus 3.0			
			ICOC	MUSB3-FL-XX

