



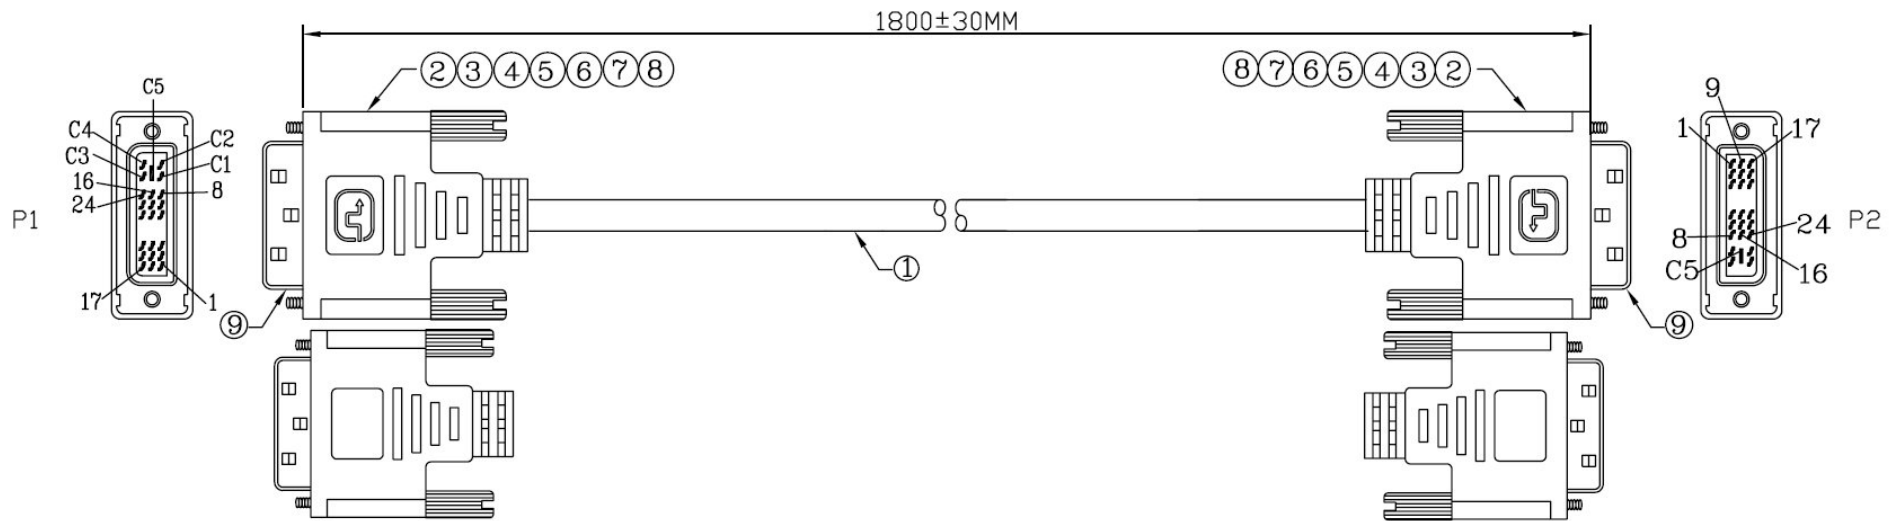

ELECTRICAL TEST:

- 1.100% OPEN & SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE:2 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms

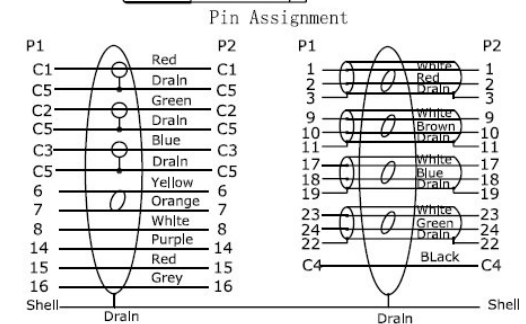

9	DVI M Transparent PVC dust cover
8	1.5 black heat shrinkable casing 18 mm thick wall * 2 PCS
7	Black heat shrinkable casing: 1.0 * 12 mm thin wall
6	Black heat shrinkable casing: 2.5 * 10 mm thin wall
5	Transparent PE material environmental protection low density
4	45 p black PVC material environmental protection
3	#4-40UNC 2.8*45MM nickel-plated iron screw
2	DVI(18+5)M Welding line Iron shell plating nickel black rubber core
1	*UL20276 (28AWG(7/0.127TC)*1C+EA)*3COAX+(28AWG(7/0.127TC)*1P+EAM)*4C +28AWG(7/0.127TC)*1P+28AWG(7/0.127TC)*5C +AEB(50%AL) OD:9.2MM 黑色 印: E342987 凡 AWM STYLE 20276 80C 30V VW-1 DVI CABLE*
NO	DESCRIPTION



DVI (18+5) M/M 28AWG Nichel Plated

ICOC DVI-9000