



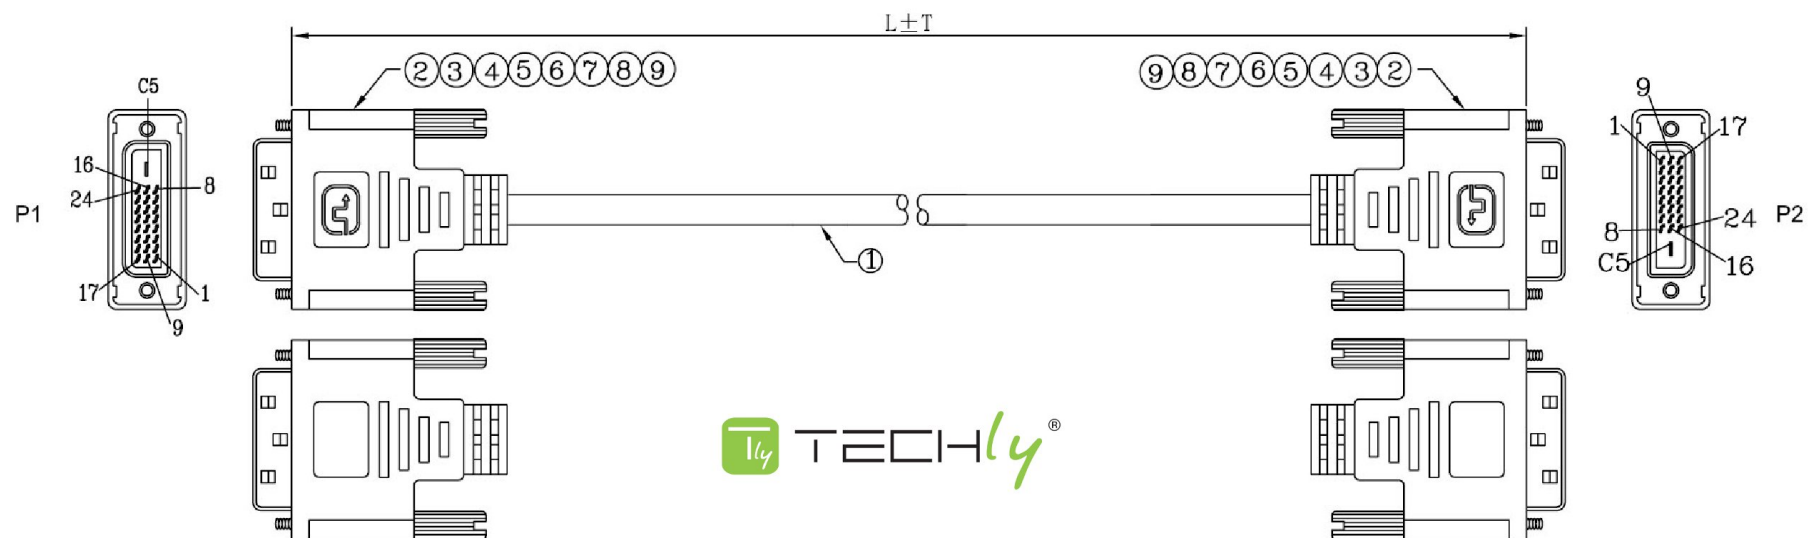

- 1.100% OPEN & SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE:1 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms

PIN Assignment

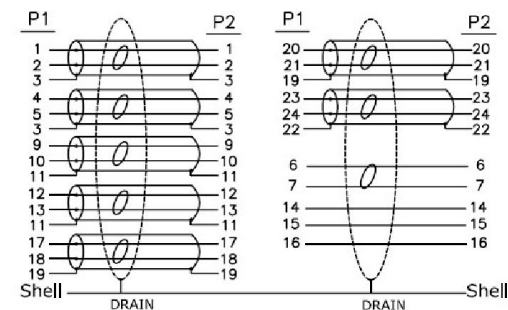

9	Black Ø1.5*20mm. *2PCS
8	Black Ø1.0*12mm. *14PCS
7	Black Ø2.5*10mm*14PCS.
6	DVI M DUST CAP
5	PE
4	#4-40UNC 2.8*45MM NICKEL PLATED
3	45P BLACK PVC
2	DVI(24+1)M SOLDER SHELL NICKEL PLATED INSULATION:BLACK
1	UL20276 (28AWG*1PR+EAM)*7C+28AWG*1PR+28AWG*3C+AEB(50%AL) OD:8.5MM BLACK MARK:E***** ... ***** DVI CABLE
NO	DESCRIPTION

Length:	T
500	±15mm
1800	±30mm
3000	±40mm
5000	±50mm
10000	±100mm