



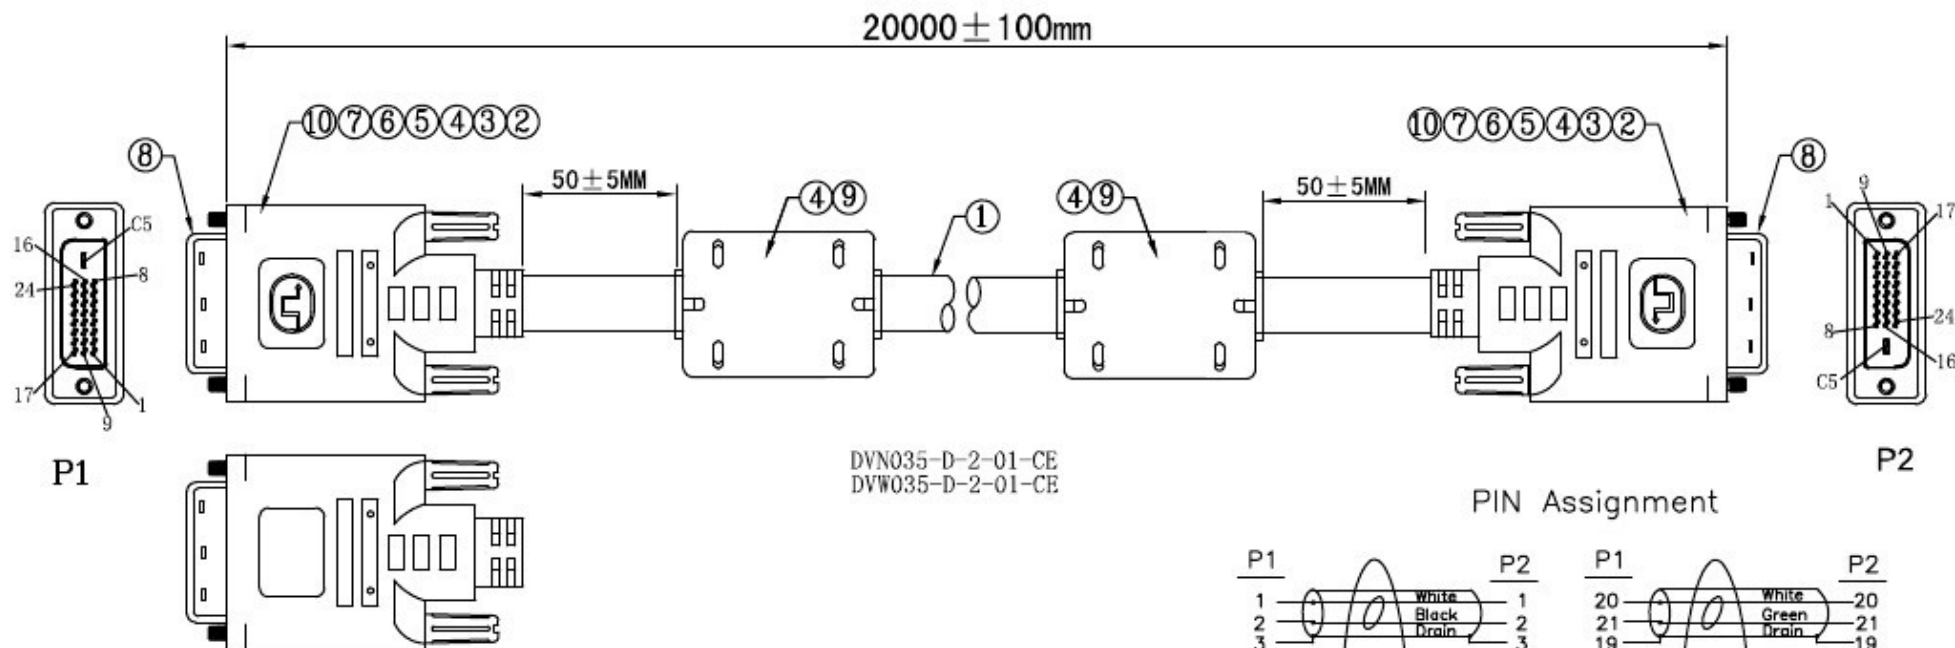

ELECTRICAL TEST:

- 1.100% OPEN & SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE:2 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms

PIN Assignment

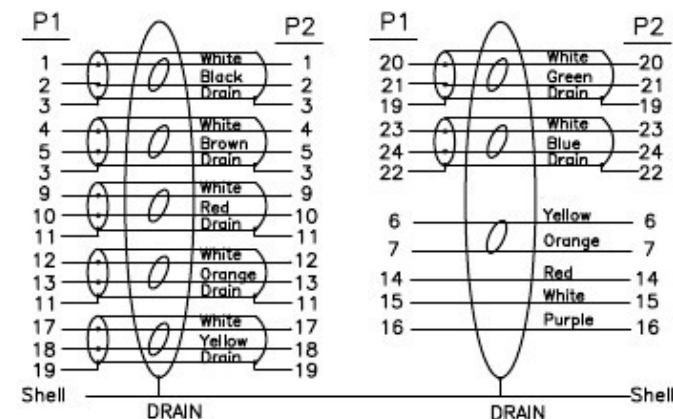

10	H, S, T ϕ 1.5 BLACK 25MM*2PCS	0.05	M
9	magnet ring 30*26*12.7MM	2	pcs
8	DVI M Transparent PVC dust cover	2	pcs
7	#4-40UNC 2.8*53.6MM NICKEL screw	4	pcs
6	H. S. T : ϕ 1.0*12mm*14pcs BLACK	0.168	m
5	H. S. T : ϕ 4.0*10mm*14pcs	0.14	m
4	outer molding 45P BLACK PVC	80	g
3	inner ,molding LD PE	10	g
2	DVI(24+1)M Welding line SHELL GOLD BLACK PLUG	2	pcs
1	UL20276 [24AWG(7/0.2TC)*1PR+EAM]*7C+24AWG(7/0.2TC)*1P+24AWG(7/0.2TC)*3C+F+AEB 50% AL OD:12.0MM BLACK ,MARK : DVI CABLE	20	M
NO	DESCRIPTION	Q'TY	UNIT

		TOLERANCE				
		INCHES M/M				
.X		.015	.30			
.XX		.010	.10			
.XXX		.005	.05	TITLE: DVI(24+1) M/M 24AWG+CORE 35# GOLD		
				CUSTOMER P/N : ICOC DVI-8120F		
				SCALE	NONE	REV A0
				UNIT	MM	

