


由 Autodesk

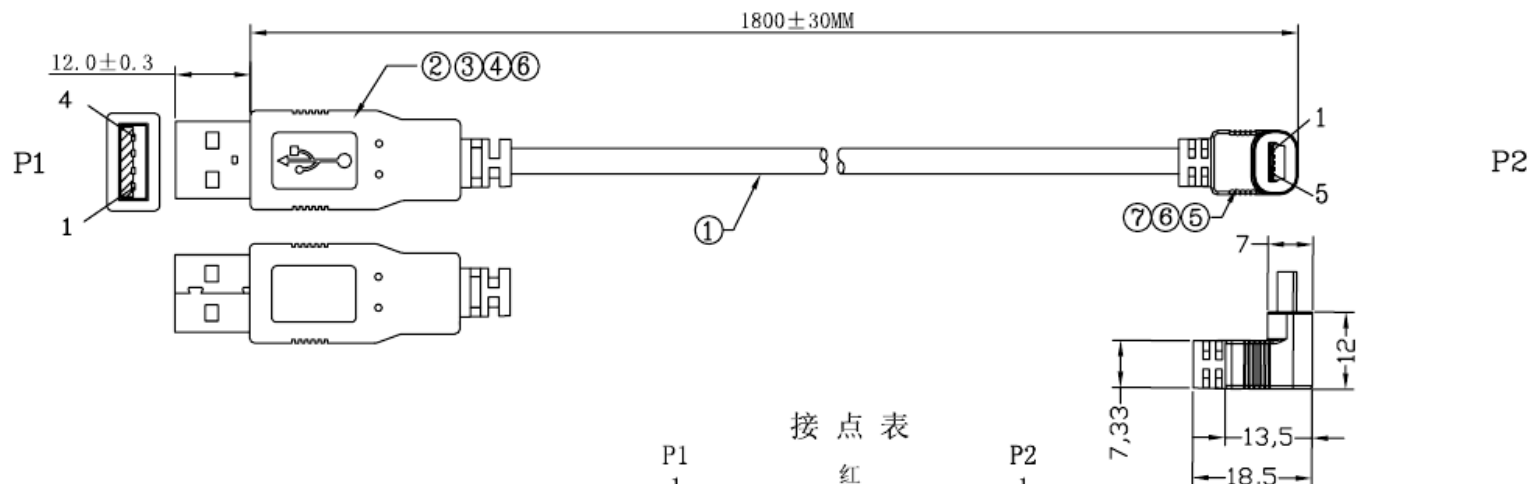

ELECTRICAL TEST:

- 1.100% OPEN SHORT SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE:2 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms

注意事项:

- 1.P1端脱外被15MM,芯线保留13MM, 去皮2MM
- 2.P2脱外被15MM, 芯线保留7MM, 去皮2MM

USB AM 外	USW349-D-02-01-CE
Mini 5P 内	USN638-D-4-01-CE
Mini 5P 外	USW638-D-4-01-CE

A06	ECN2017100033	
A05	ECN2017060096	
A04	ECN2017050108	
A03	ECN2016100252	
TOLERANCE INCHES M/M		
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05
TITLE: USB AM TO MINI USB 5P BM NICKEL		
DRAWN BY		CUSTOMER :
CHECK BY		CUSTOMER P/N :
APPD BY		DATE :
SCALE		NONE
UNIT		MM
REV. A06		1/2

7	A5-R047011		3	g	
6	A5-R047001	45P PVC	12	g	
5	A2-R028869	MINI USB 5P/M	1	pcs	
4	A6-R028096	USB(A)M	1	pcs	
3	A6-R028095	USB(A)M	1	pcs	
2	A2-R028039	USB(A)M	1	pcs	
1	A0010306-01306	USB 2.0 28AWG(V/D. 12TTC) 4P-28AWG(V/D. 12TTC) 42C-A5B(16/4/0.12AL. 65N) 颜色: 黑色(3C) 平露面	1.8	m	
NO	CELINK P/N	DESCRIPTION			

由 Autodesk